

3068N9C2B | 碳刷 Graphite Brush

应用领域：医疗、保健、汽车、机器人、工业自动化等精密驱动领域。

Applications: precision drives in medical equipment and devices, healthcare products, automotive, robotics, and industrial automation.


主要技术指标 | Characteristics

			01-85-24.0	02-85-36.0	04-87-48.0	
1	电压	Voltage	V	24.0	36.0	48.0
2	转子电阻	Rotor Resistance	Ω	0.9	1.5	3.65
3	空载转速	No-load speed	rpm	8500	8500	8700
4	空载电流	No-load current	mA	150	130	50
5	堵转转矩	Stall torque	mNm	711.0	960.2	687.6
6	堵转电流	Stall current	mA	26670	24000	13150
7	额定转矩	Nominal torque	mNm	60.0	86.0	30.0
8	额定转速	Nominal speed	rpm	7780	7740	8320
9	额定电流	Nominal current	mA	2390	2270	620
10	最大输出功率	Max. output power	W	158	214	157
11	最大效率	Max. efficiency	%	86	86	88
12	反电势常数	Back-EMF constant	mV/rpm	2.8	4.2	5.5
13	转矩常数	Torque constant	mNm/A	26.8	40.2	52.5
14	转速 / 转矩斜率	Speed/torque gradient	rpm/mNm	12.0	8.9	12.7
15	转子惯量	Rotor inertia	gcm ²	33	33	33
16	重量	Weight	g	250	250	250
17	热阻 (机壳 - 环境)	Thermal resistance housing-ambient	K/W		6.2	
18	热阻 (线圈 - 机壳)	Thermal resistance winding-housing	K/W		3.8	
19	热时常数 (电机)	Thermal time constant motor	s		225	
20	热时常数 (线圈)	Thermal time constant winding	s		7.8	
21	工作温度范围	Operating temperature range	°C		-20~+120	
22	绕组耐温等级	Thermal class of winding	°C		155	
23	轴向间隙	Axial play	mm		0.02~0.15	
24	径向间隙	Radial play	mm		0.025	
25	动态轴向载荷	Axial load dynamic	N		5.6	
26	静态轴向载荷	Axial load static	N		110	
27	径向载荷 (距安装面 3mm)	Radial load at 3 mm from mounting face	N		30	
28	极对数	No. of pole pairs			1	
29	轴承	Bearings			2 枚滚动轴承/2 ball bearings	
30	换向结构	Commutator			贵金属 9 相/metal 9 segments	
31	防护等级	Protection class			IP 20	

★可选参数 Options: 导线长度 Lead wires length 轴长 Shaft length 性能 Special coils

齿轮箱 Gearheads 编码器 Encoder

外观图 | Outline Drawing

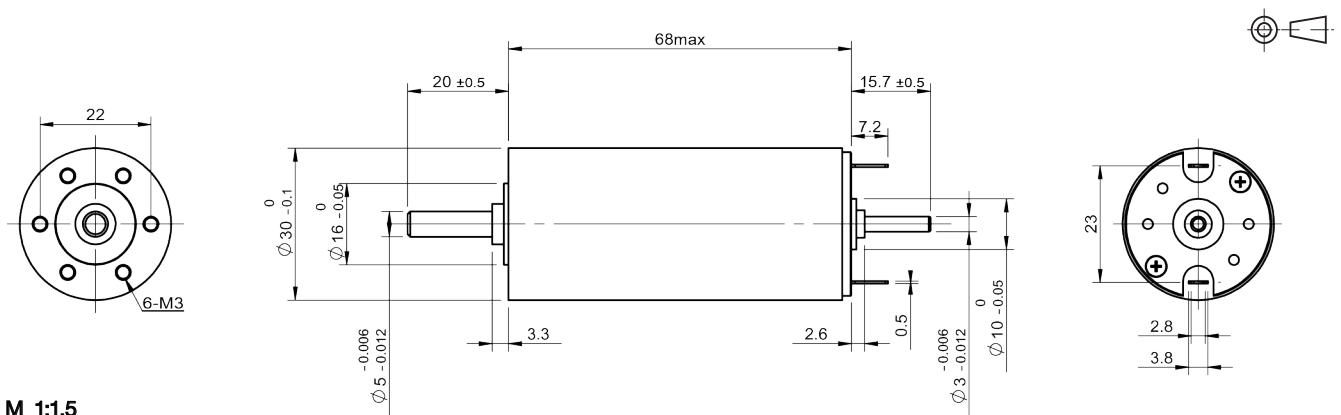

M 1:1.5