


DATASHEET

ITEM CODE

CETTIG[®]

25684LED

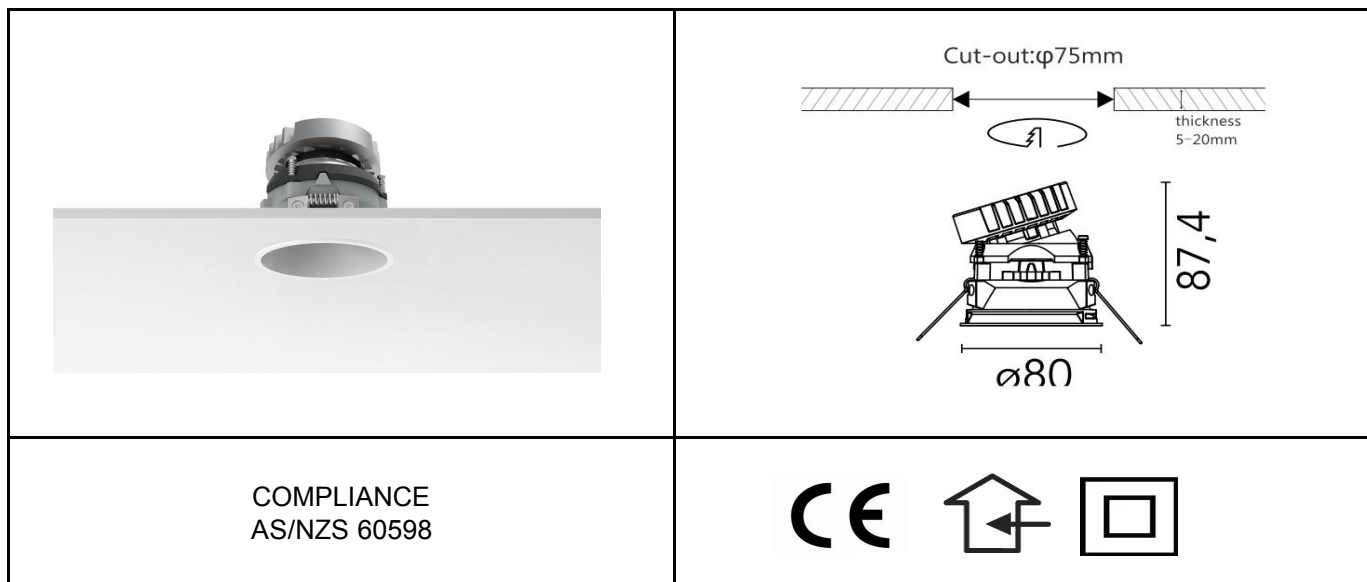

COMPLIANCE
AS/NZS 60598



PHYSICAL CHARACTERISTICS

| | | | |
|-------------------------|-----------------|----------------------|----------------------------|
| INSTALLATION | Recessed | ROTATION | Non rotatable |
| DRIVER | Remote | IP-RATING | IP20 |
| CUT-OUT SIZE | Ø75mm | IK-RATING | IK03 |
| DIMENSION | Ø80mm x H80.4mm | FIXTURE MATERIAL | Housing: Die-Cast Aluminum |
| CEILING THICKNESS RANGE | 5-20mm | STANDARD FINISH | White / Black |
| RECESSED DEPTH REQUIRED | | PACKAGE | / |
| ADJUSTABILITY | ADJUSTABLE | WEIGHT | / |
| REFLECTOR | White | OPTIONAL ACCESSORIES | |

ELECTRIC / PHOTOMETRIC DATA

| | | | | |
|--|--------------|------------|------------------------|--|
| LIGHT SOURCE | EVERCORE COB | | CHROMATICITY TOLERANCE | SDCM≤3 |
| LED CURRENT | 180mA | 250mA | COLOR RENDITION INDEX | Ra ≥ 80/Ra ≥ 90 |
| LED VOLTAGE | 36V | 36V | COLOR TEMPERATURE | 2700K 3000K 4000K |
| LED POWER | 6.5W | 9W | BEAM ANGLE | 24°/38°/50° |
| SYSTEM POWER | 7W | 10W | DIMMING OPTION(S) | NON-DIM/PHASE/1-10V/DALI |
| LED LUMINOUS FLUX | | | CERTIFICATION | CE |
| LUMINAIRE LUMINOUS FLUX ±10% (3000K CRI 90) | | | POWER FACTOR | |
| LUMINAIRE LUMINOUS FLUX ±10% (2700K CRI 90) | 465-515LM | 665-736LM | UGR | <19 |
| SYSTEM EFFICACY (3000K CRI 90) | 73 LM/W | 73 LM/W | DRIVER OPTION(S) | EAGLERISE/EUCHIPS/TRIDONIC/ OSRAM/TCI/MEANWELL/L-TECH |

MISCELLANEOUS SPECIFICATIONS

| | |
|------------------------|---------------|
| ENERGY CLASS | A |
| MAINS VOLTAGE | 220-240 V AC |
| OPTIONAL VOLTAGE | 100-240 V AC |
| FREQUENCY | 50/60 Hz |
| SAFETY CLASS | II |
| ENVIRONMENTAL TEMP. | -20°C / +40°C |
| RATED SERVICE LIFE (h) | 50000 |
| WARRANTY | 5 Years |

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.

Hongkong CETTiGA Lighting Equipment Co., Limited / Foshan Shengtianjia Lighting Equipment Co.,Ltd / Shenzhen Cettiga Lighting Technologies Co., LTD

Tel:+86 757 86604263 / 86604095 Fax:+86 757 86604095

Email: shengtianjia@cettiga.com Website: www.cettiga.com