

L0616...06PP... | 行星齿轮系列 Planetary Gearbox Series


应用领域：医疗器械、安防设备、视像产品、高端智能电玩、个人保健产品等领域。

Applications: medical equipment, security systems and locks, audio and visual products, personal healthcare products, and high-end hobby products.

电机主要技术指标 | Motor Characteristics

| | | | L0616-1300-3.0-06PP25-0001 | L0615-1300-3.0-06PF25-0025 | L0615-1800-3.0-06PR25-0035 |
|----|--------|-----------------------------|----------------------------|----------------------------|----------------------------|
| 1 | 电压 | Voltage | V | 3.0 | 3.0 |
| 2 | 端电阻 | Terminal resistance | Ω | 13.7 | 7.8 |
| 3 | 空载转速 | No-load speed | rpm | 1300 | 1750 |
| 4 | 空载电流 | No-load current | mA | 50 | 55 |
| 5 | 最大转矩 | Max torque | mNm | 2.94 | 3.4 |
| 6 | 负载转矩 | Load torque | mNm | 0.2 | 0.2 |
| 7 | 负载转速 | Load speed | rpm | 1210 | 1680 |
| 8 | 负载电流 | Load current | mA | 60 | 65 |
| 9 | 减速比 | Reduction ratio | | 1/25 | 1/25 |
| 10 | 重量 | Weight | g | 1.2 | 1.2 |
| 11 | 工作温度范围 | Operating temperature range | $^{\circ}\text{C}$ | -10~+70 | -10~+70 |

特性曲线 | Characteristics Curve

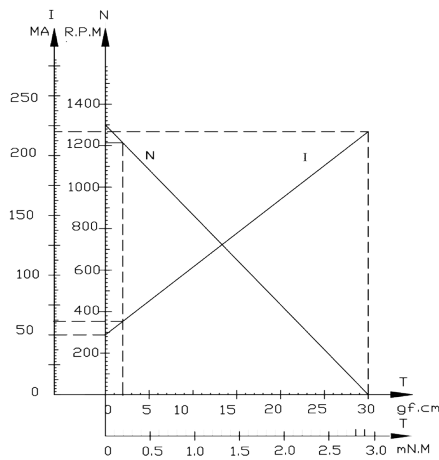

型号 / Model L0616-1300-3.0-06PP25-0001

可选参数 | Options

导线长度
性能

Lead wires length
Special coils

外观图 | Outline Drawing

